



AX11/AX300 JBUS

1 Tracker

- Plug Tracker into Female port of OBD-II Splitter Cable. Tracker must be installed as high as possible underneath the dashboard without being obstructed by any metal brackets or framing.

2 Splitter Cable


- Splitter Cable allows Tracker to be installed covertly up underneath vehicle's dashboard. Contains 1 Female OBD-II port, 1 Female JBUS port & 1 Male JBUS port.

3 Female JBUS Port

- Remove the OEM JBUS port and install this port in OEM port location.

4 Male JBUS Port

- Male port of JBUS Splitter Cable plugs into OEM Female JBUS port.

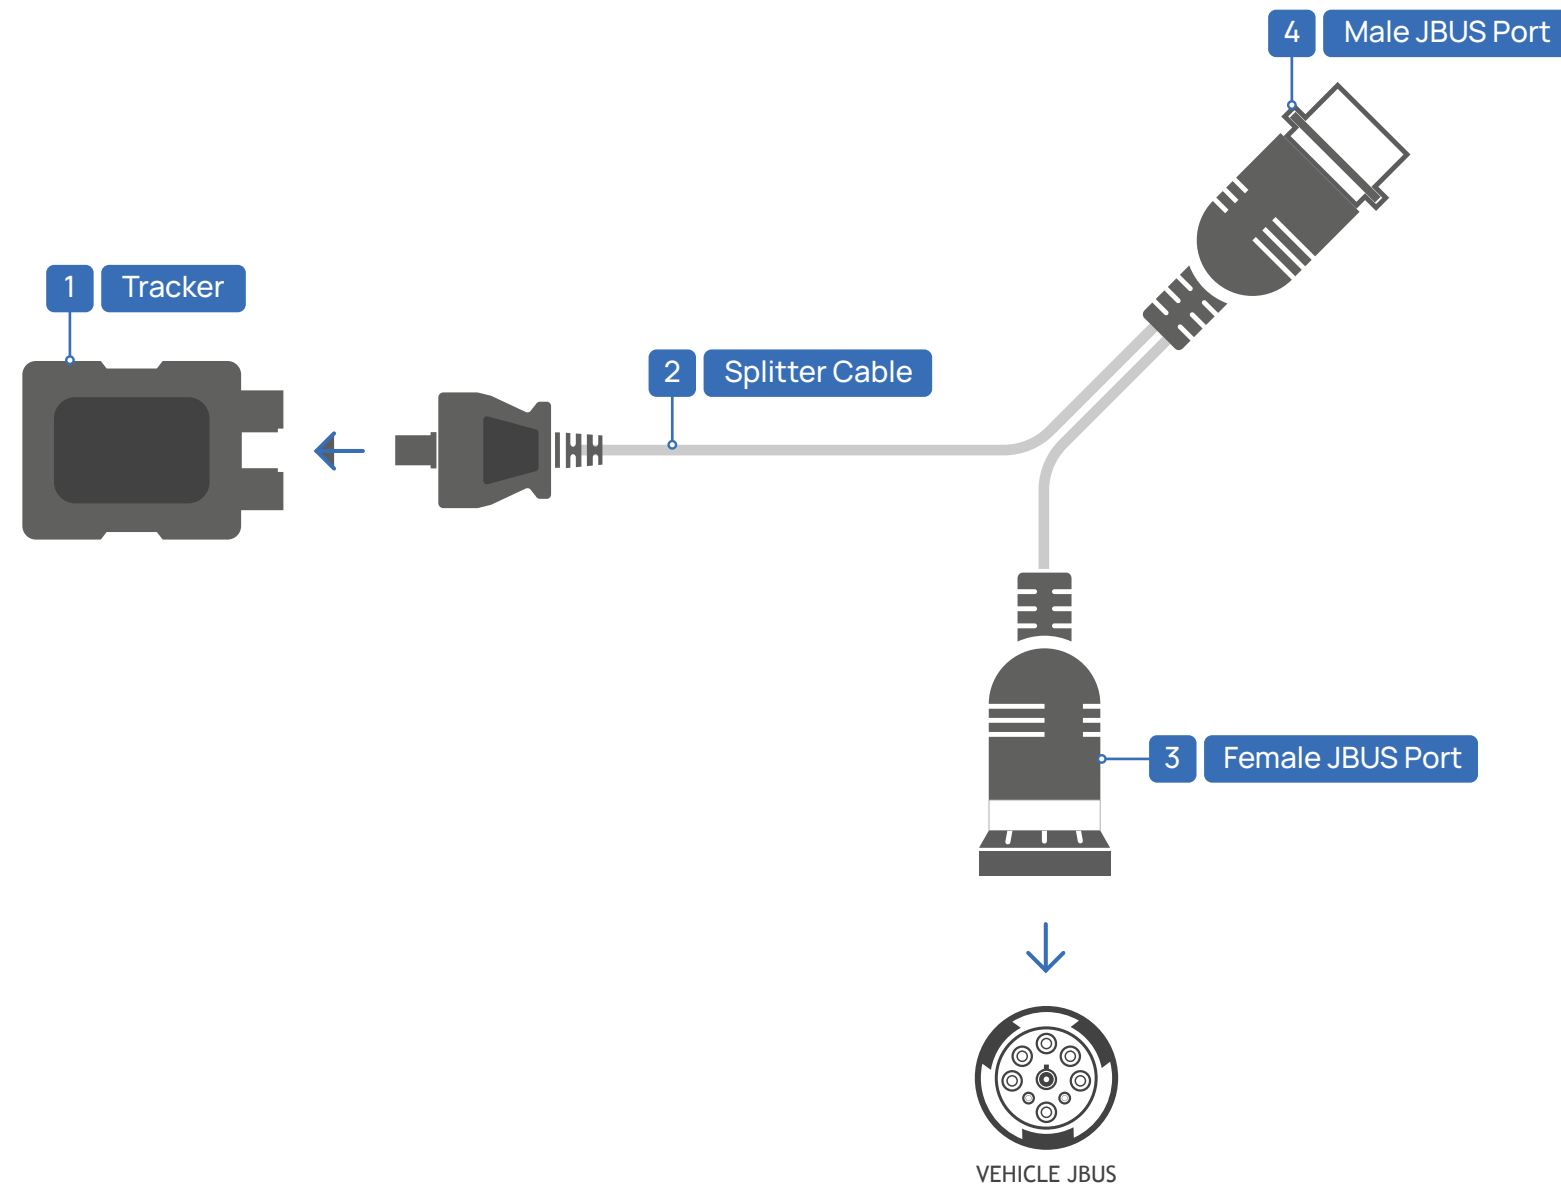



AX11/AX300 OBD-II

1 Tracker

- Plug Tracker into Female port of OBD-II Splitter Cable. Tracker must be installed as high as possible underneath the dashboard without being obstructed by any metal brackets or framing.

2 Splitter Cable

- OBD-II Cable allows Tracker to be installed covertly up underneath vehicle's dashboard. Contains 2 Female OBD-II ports & 1 Male OBD-II port.

3 Female OBD-II Port

- Remove the OEM OBD-II port and install this port in OEM port location.

4 Male OBD-II Port

- Male port of OBD-II Splitter Cable plugs into OEM Female OBD-II port.

