

FleetCam® Outdoor AHD camera

FC-CAM-OS-AHD-2.8



FEATURES & BENEFITS

- Waterproof and Dust-Tight
- Built to withstand harsh weather
- Easy to install with lockable angles
- Anti-Vibration for smooth recording
- Infrared Sensors for night vision

FleetCam® Outside IP66 720P 2.8MM

The FleetCam™ 2.0 Outside Cam, typically mounted to the rear of the vehicle, is built to weather the elements. Dust-tight and waterproof with a sun shield and anti-vibration feature, it gets the shot even in the toughest conditions. The Outside Cam gives you a clear image by automatically adjusting the color and shutter speed while using infrared sensors to record at night.




SPECIFICATION

CMOS	1/3" 1.3M pixel CMOS	Color to black	External synchronously control
Resolution	1280x720	Gamma Correction	0.45 (default)
Format	NTSC	Video output	AHD coaxial HD output, 4-pin aviation cable
Minimum illumination	0 lux @ F1.2	Power	130mA/DC12V±5%
IR distance	15-30 feet	Consumption(Max.)	150mA/DC12V ±10mA
Sync system	Internal synchronously	Working temperature	-4°F ~ 122°F
S/N	≥50dB	Weight	380g (~0.84 lbs)
Lens	2.8mm	White balance mode	Auto
Electronic shutter	Auto		



FleetCam[®] Outdoor AHD camera

FC-CAM-OS-AHD-2.8

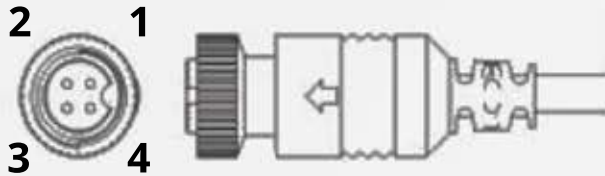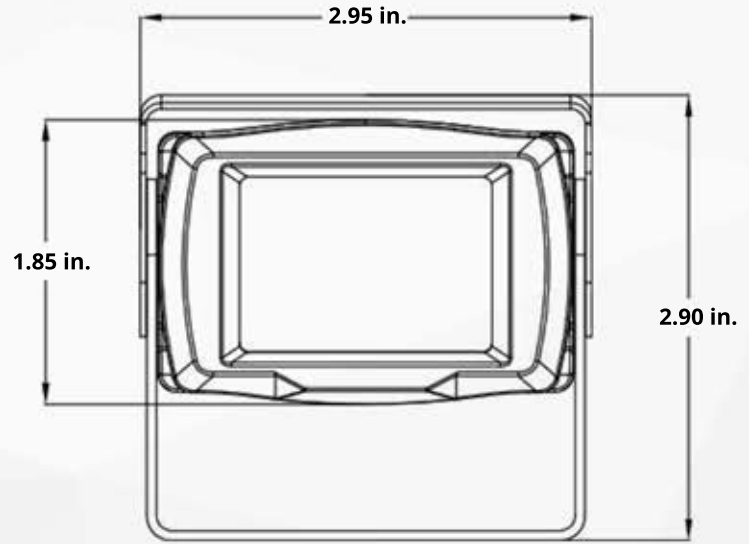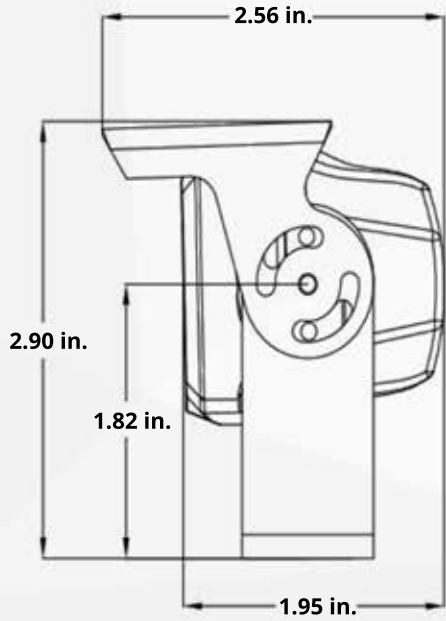

Aviation RS765-4(Female)

- 1. 12VDC(+) 3. NC
- 2. 12GND(+) 4. AHD VIDEO